



Retracom
Manufacturing

60 Magnessium Drive
Crestmead, QLD. 4132
Telephone: (07) 3803 4733
Facsimile: (07) 3803 4711
Email: sales@retracom.com.au

THIS DRAWING IS THE PROPERTY OF RETRACOM AND IS RESTRICTED TO ITS OWN USE. THE WHOLE OR ANY PART THEREOF MAY NOT BE COPIED OR REPRODUCED OR LOANED IN ANY FORM WITHOUT THE WRITTEN AUTHORISATION OF THE COMPANY.

Title: For: ...


MAIN & INTERMEDIATE CEILING SUSPENSION WITH GRIPPLE HANG-FAST

Date Drawn: DEC 2001
Checked: ...
Scale: N.T.S.

By: J.B.
Job No.: ...
Drawing No.: SPA-12-004-02
Sheet: A4 of 1

Revision: "D"
FEB 2010

SECTIONAL ELEVATION

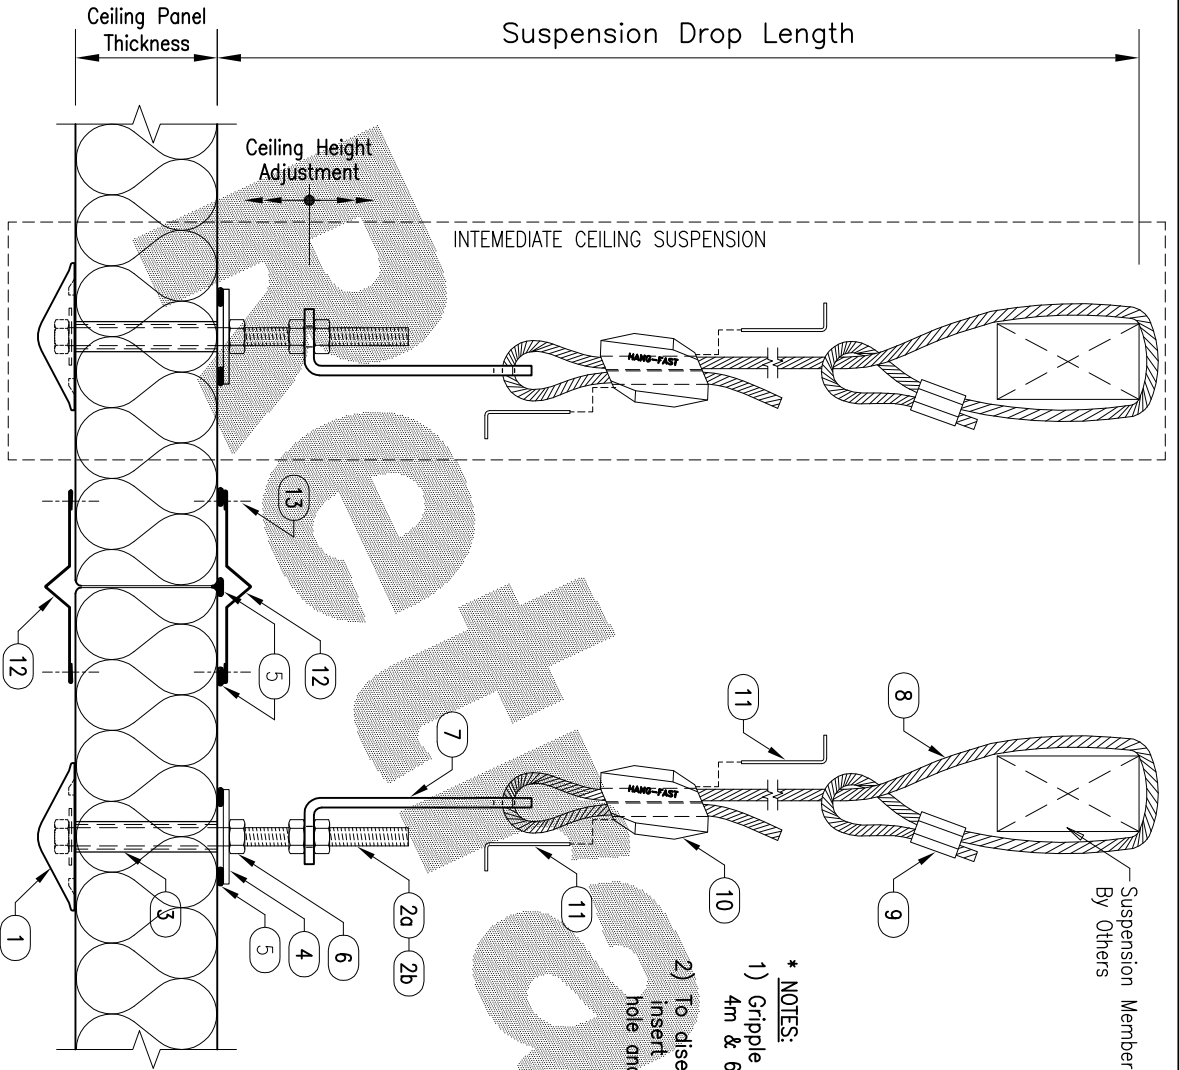

- * NOTES:
- 1) Gripple Hang-Fast assys are available in 4m & 6m standard wire rope lengths.
 - 2) To disengage the lock on the wire rope insert the Release Key (11) in smallest hole and apply light pressure.

ITEM PART No.	DESCRIPTION	QTY. TOTAL
1-14 CRA-1279	COMPL. ASSY WITH 4m DROP LENGTH	1
1-14 CRA-1280	COMPL. ASSY WITH 6m DROP LENGTH	1
1	ø78 Mushroom Head	1
2a	M10 Z.P. Threaded Rod 200 L.	1
2b	M10 Z.P. Threaded Rod 300 L.	1
3	ø16 PVC Ferrule to suit . . . mm Ceiling	1
4	10mm ø50x3 Alum. Panel Washer (Tubes) As Req.	1
5	Sedant	As Req.
6	M10 Z.P. Hex Nuts	3
7	120 x 35 x 5 Suspension "L" Bracket	1
8-11 CRS-290	Wire, Ferrule & Gripple Hang-Fast Assy	1
8	5mm Wire Rope	1
9	Wire Rope Ferrule	1
10	No. 4 (225kg) Gripple Hang-Fast	1
11	Release Key	1
12	0.6 C/B. Suspension Flashing (3m L. eq.) As Req.	As Req.
13	5/32" Rivets	As Req.
14	Safety Load Sticker	As Req.

* NOTE: * DIMENSIONS ARE IN "mm." * DO NOT SCALE

STOP

THIS CEILING IS DESIGNED FOR MAINTENANCE PERSONNEL WORK ONLY

MAXIMUM CONCENTRATED LOAD OF 1.4 kN PER PANEL (1 MAN AND HAND CARRIED TOOL BOX (140KG) PER PANEL x 1200w

NO TROLLEYS

NO STORAGE

Retracom Insulated Panel Systems

DATE _____ JOB No. _____